









Installation and User Guide







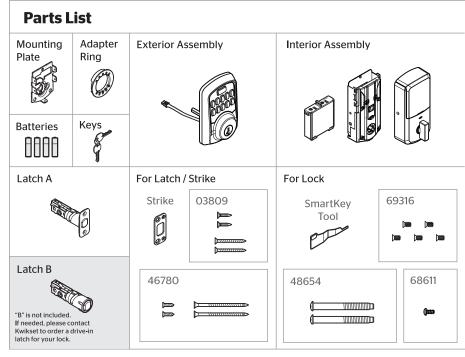


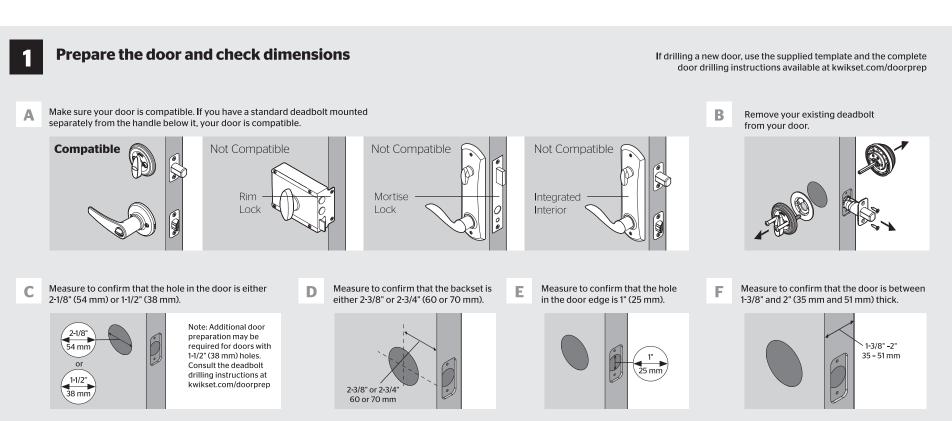


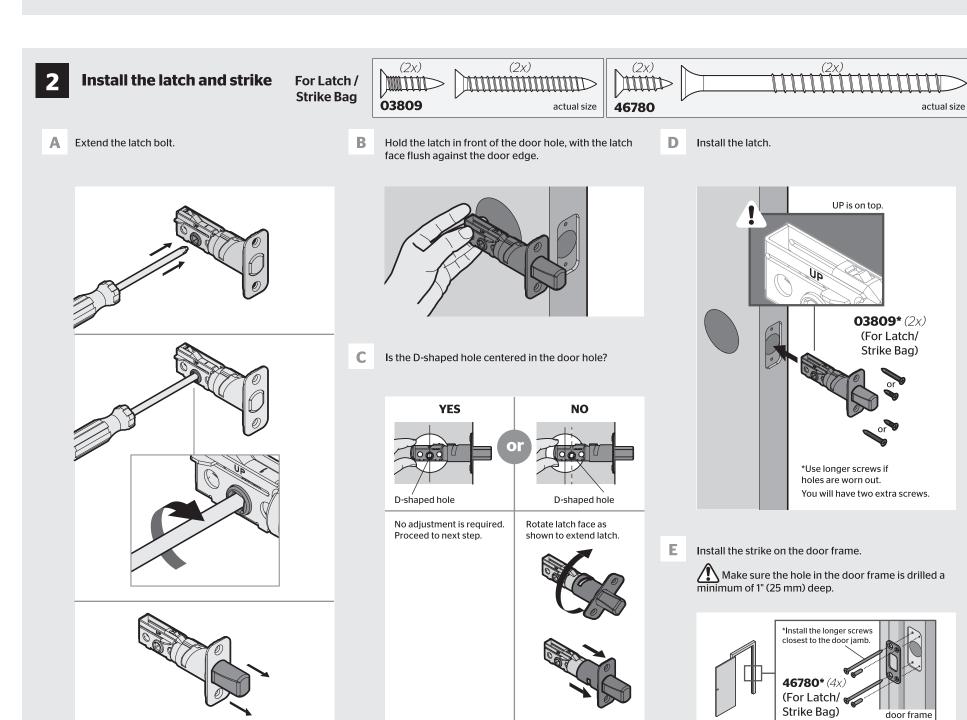


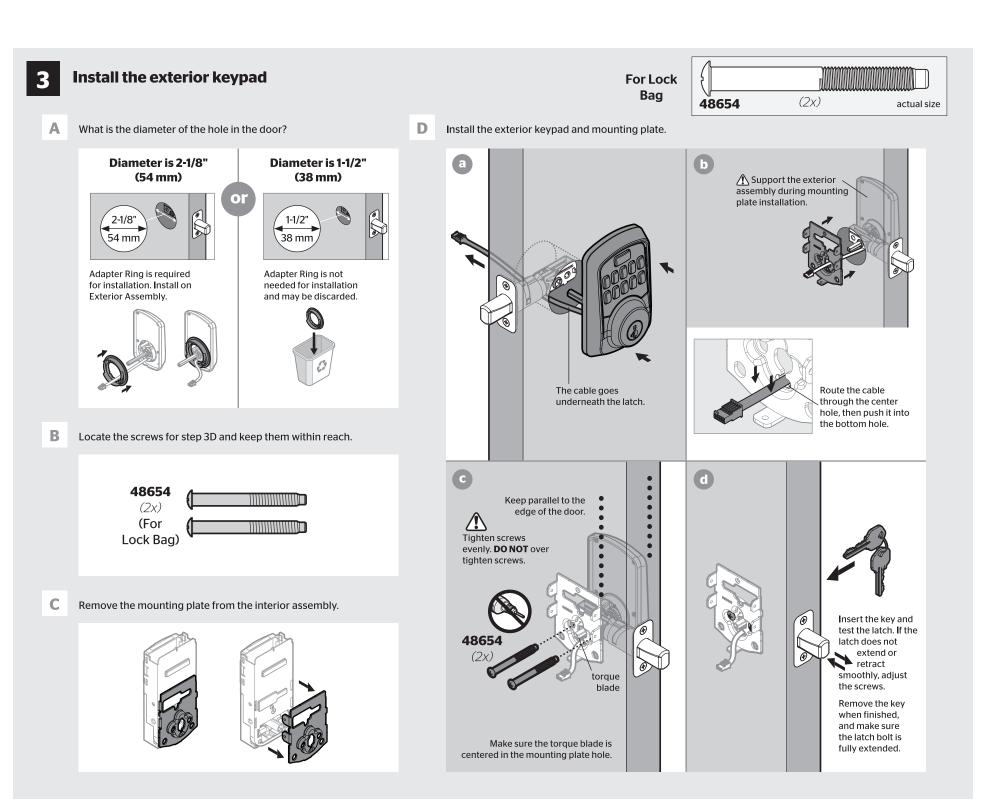


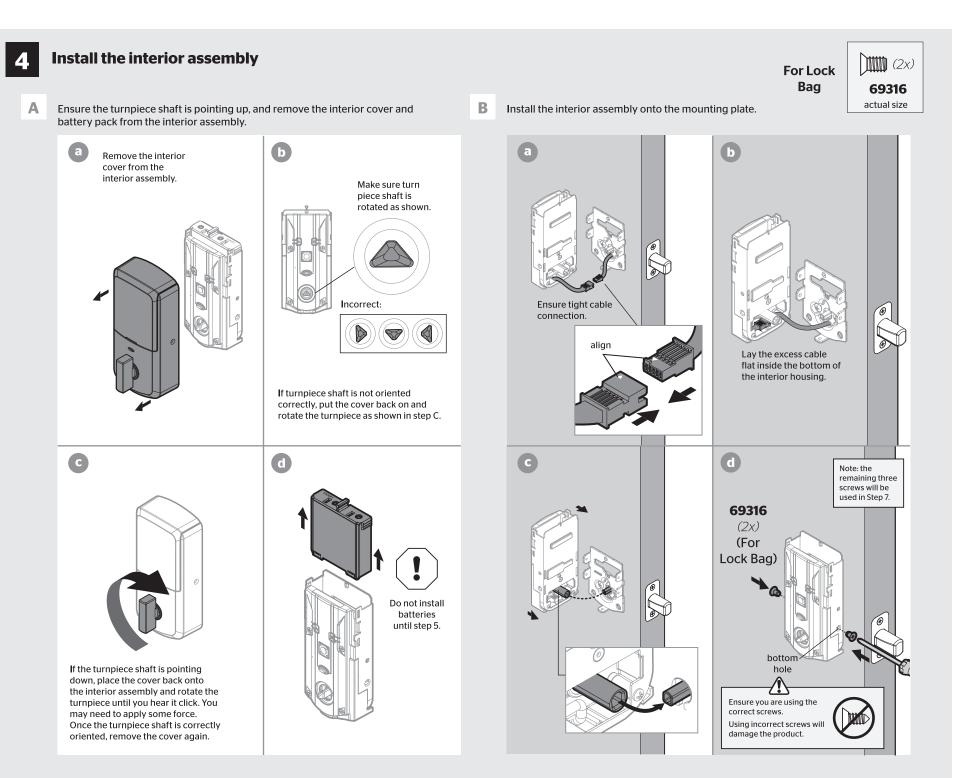

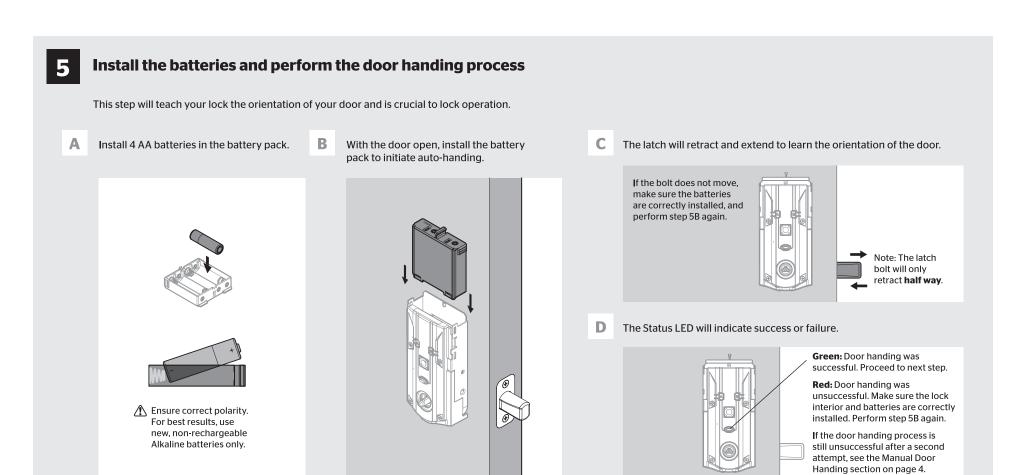

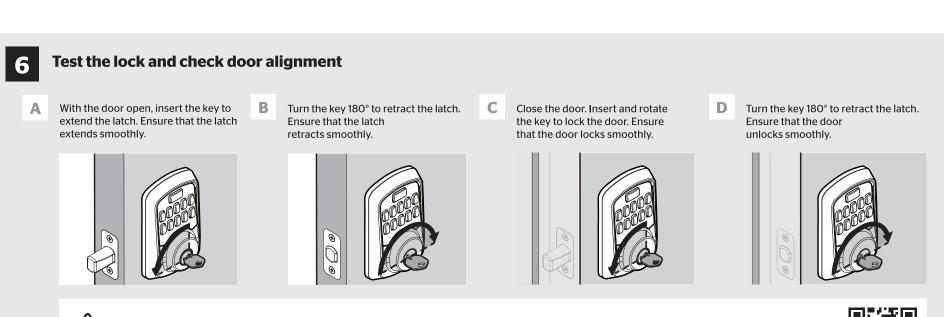

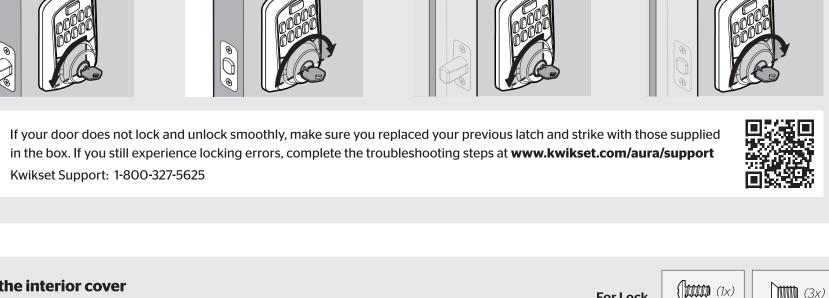

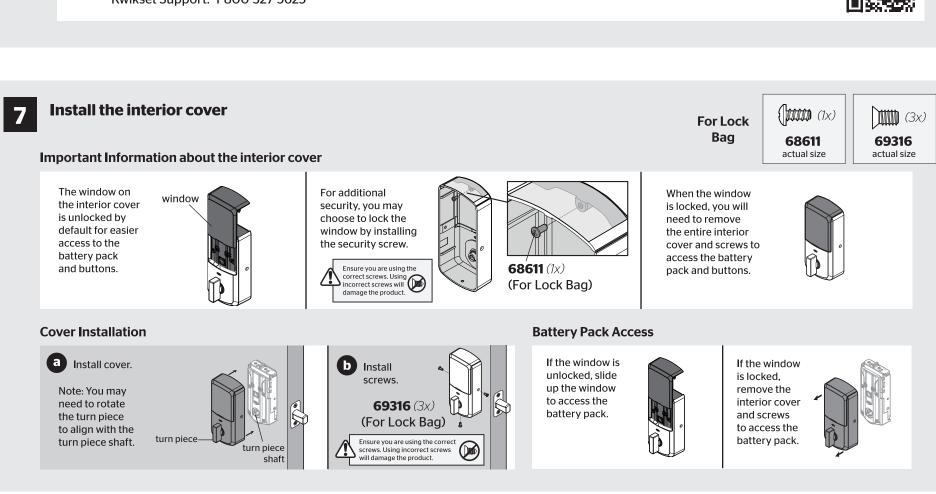





1\ The Kwikset app is needed to use this lock. If this lock was professionally installed (or installed by someone other than the homeowner), make sure this step is performed by the homeowner.




Download the Kwikset app by scanning the QR code or visiting www.kwikset.com/app on your smartphone.



Create your account and follow the setup instructions in the Kwikset app.

Aura at a Glance

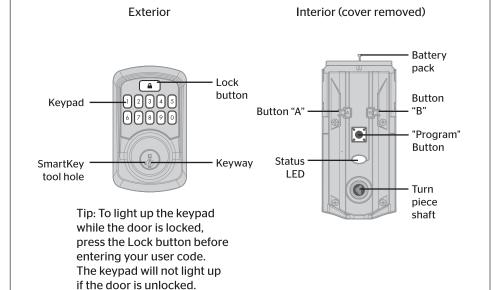


System Alerts

Alert	Reason	Solution
Keypad flashes red once with one beep*.	One incorrect code entered.	Re-enter code.
Keypad flashes red three times with three beeps*.	No user code programmed.	Program at least one user code.
Keypad flashes red 15 times with 15 beeps*	Three incorrect codes entered.	Re-enter code after 60 second keypad lockout.
Keypad flashes red with fast beeping sound for three to four seconds.	Low battery.	Replace batteries.
Keypad flashes red with continuous beeping sound for two seconds.	Door jammed while attempting to lock.	Manually re-lock door. If needed, reposition strike.
Lock beeps continuously.	Interior assembly is disconnected from exterior.	Remove battery pack, reconnect the interior to the exterior, then reinstall battery pack.

^{*}Beeping sounds will only be heard if Lock Sounds have not been disabled in the app.

Status LED colors

These features can be adjusted in some smart home apps.



Color	Lock Status	
Green (solid)	Action successful	
Green (blinking)	Unlocked	
Red (solid)	Door handing process unsuccessful	
Red (blinking)	Action unsuccessful or incomplete	
	Low battery	
Blue (solid)	Bluetooth Pairing successful	
Blue (blinking)	Bluetooth Pairing Mode	
Amber (solid)	Entering Network Reset mode	
Amber (blinking)	Network or System Reset mode.	
	Action required.	
	Locked	


Troubleshooting

A complete Aura Bluetooth Keypad Programming and Troubleshooting Guide is available at www.kwikset.com/aura/support




Manual Door Handing

If needed, the door handing process can be initiated manually. This is useful if the lock is being moved to a different door.






2 Press and HOLD the
"Program" button
while reinserting
the battery pack.
Release the
"Program" button
after 3 seconds.
The status LED
will flash red
and green.



3 Press the "Program" button once more.



4 The latch bolt will extend and retract to learn the orientation of the door. The LED will flash green if handing is successful or red if handing is unsuccessful.

Factory Reset

Factory Reset will delete all Bluetooth pairings, user associations, remove the lock from the account and reset all lock settings including handing.


1 Remove battery pack.



2 Press and HOLD the
"Program" button
while reinserting
the battery pack.
Keep holding
the button for 30
seconds until the
lock beeps and
the status LED

Stat
LED

flashes red.



3 Press the "Program" button once more. The LED will flash green and red, and the auto-handing process will begin.



4 The latch will retract and extend to learn the orientation of the door. The LED will flash green if auto-handing is successful or red if auto-handing is unsuccessful.

SmartKey Re-Keying

Re-key the lock to work with your existing key. See the supplied SmartKey Re-key instructions for more information.

Note: If Auto-Lock is enabled, remove the battery pack before re-keying your lock.



Important Safeguards

- 1. Read all instructions in their entirety.
- 2. Familiarize yourself with all warning and caution statements.
- 3. Remind all family members of safety precautions.
- 4. Protect your user codes.
- 5. Dispose of used batteries according to local laws and regulations.
- ⚠ WARNING: This Manufacturer advises that no lock can provide complete security by itself. This lock may be defeated by forcible or technical means, or evaded by entry elsewhere on the property. No lock can substitute for caution, awareness of your environment, and common sense. Builder's hardware is available in multiple performance grades to suit the application. In order to enhance security and reduce risk, you should consult a qualified locksmith or other security professional.